




# Asus Eee PC T101MT Wireless Network Interface Card Replacement

This guide will help you replace your wireless card.

Written By: Jarnell Miranda

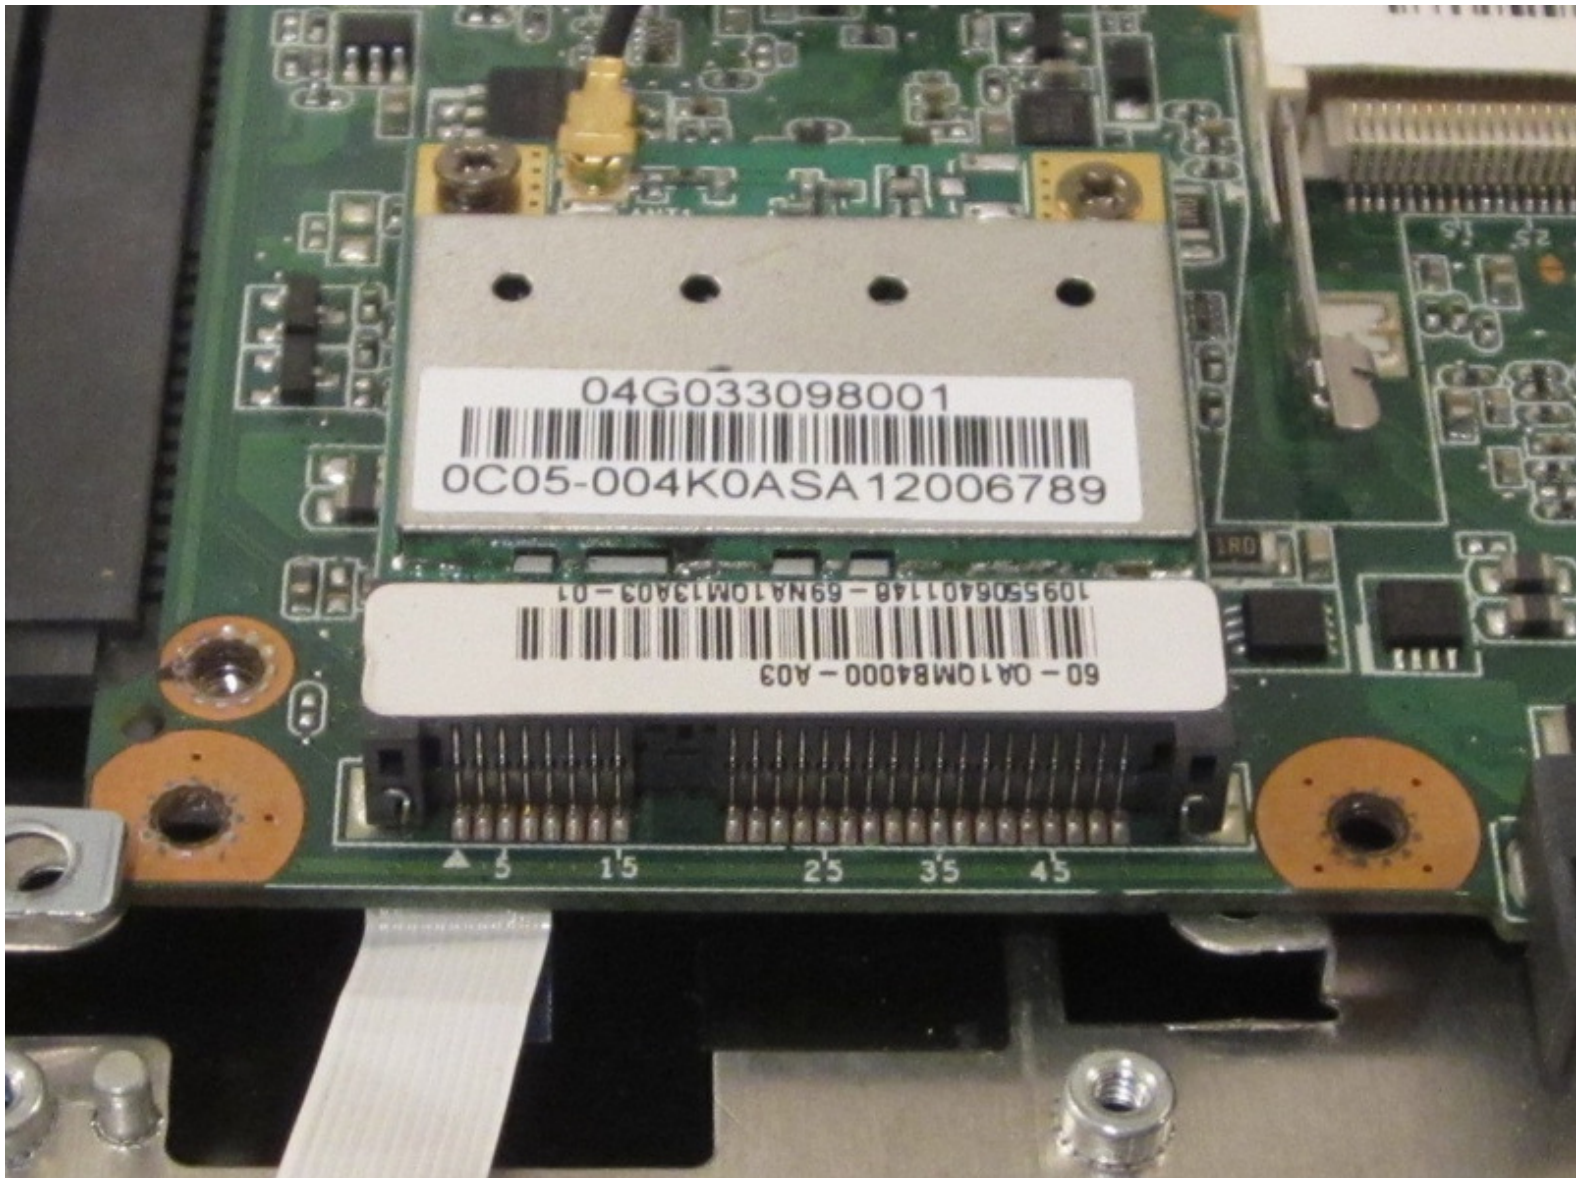

## INTRODUCTION

If you would like to replace your wireless NIC then this is the guide that you have been looking for.


---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-


## Step 1 — Battery



 Before you begin, make sure your device is powered off and not connected to the power supply.

- Turn the tablet over and position it so it matches the picture.


## Step 2

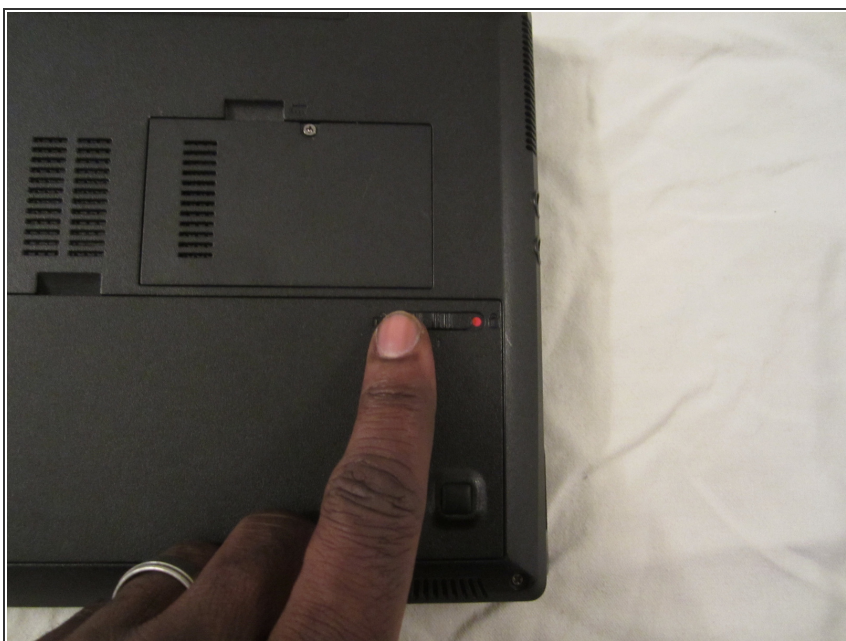

- Locate the sliding tab on the right and slide it to the left in order to unlock the battery.



### Step 3

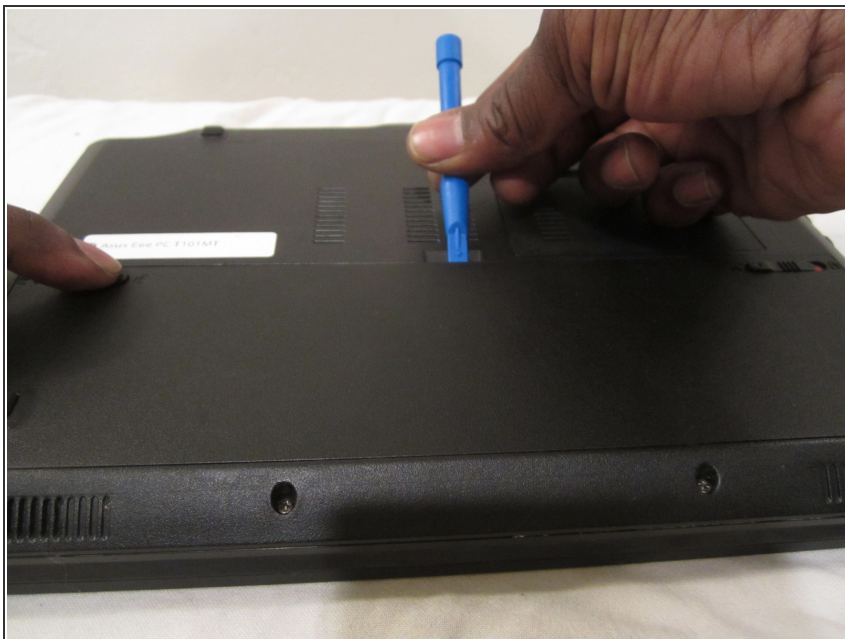

- Use a plastic opening tool to lift the battery up as you slide the tab on the left to the right.

### Step 4




- Lift the battery out of the device.

## Step 5 — Keyboard



- Turn the tablet over and open it up. Insert a nylon spudger into the slots above F1, F6, F10 to pry up the keyboard.


## Step 6

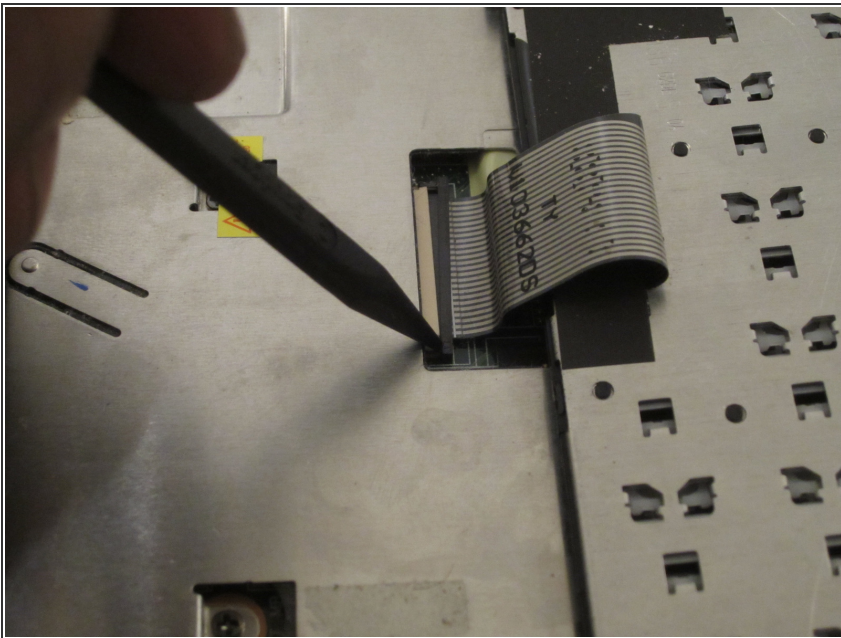

- Once you have the keyboard out, use the nylon spudger to remove the connection. You can now replace the keyboard.




## Step 7 — Wireless Network Interface Card

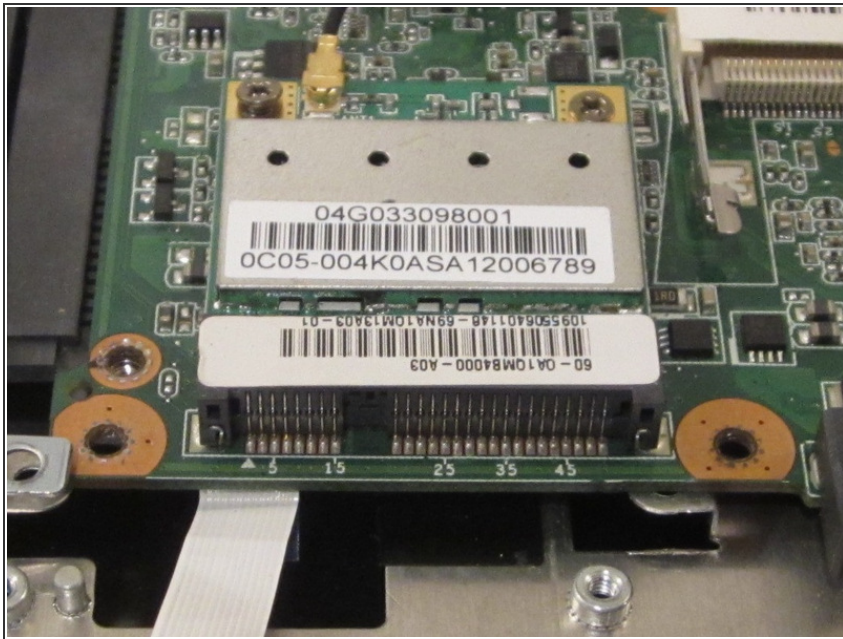


- Locate the wireless NIC (network interface card).

## Step 8

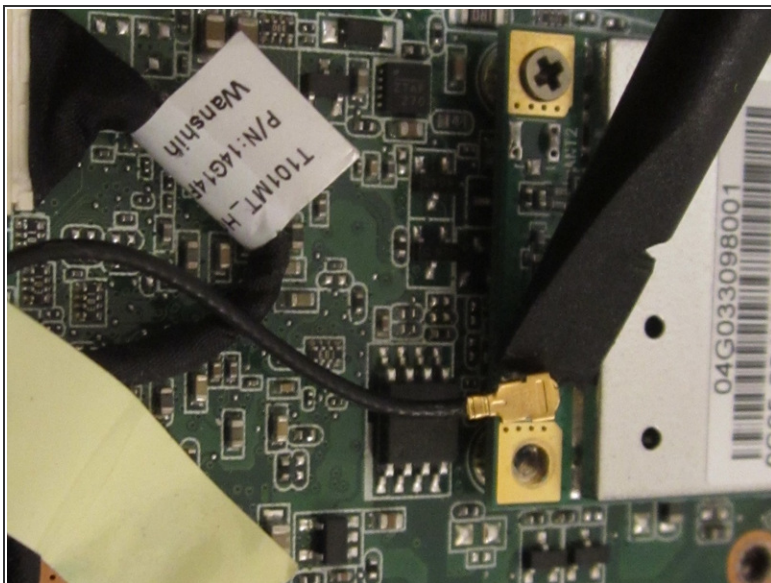

- Use a nylon spudger to lift the wireless antenna from the NIC and remove the screws.

## Step 9

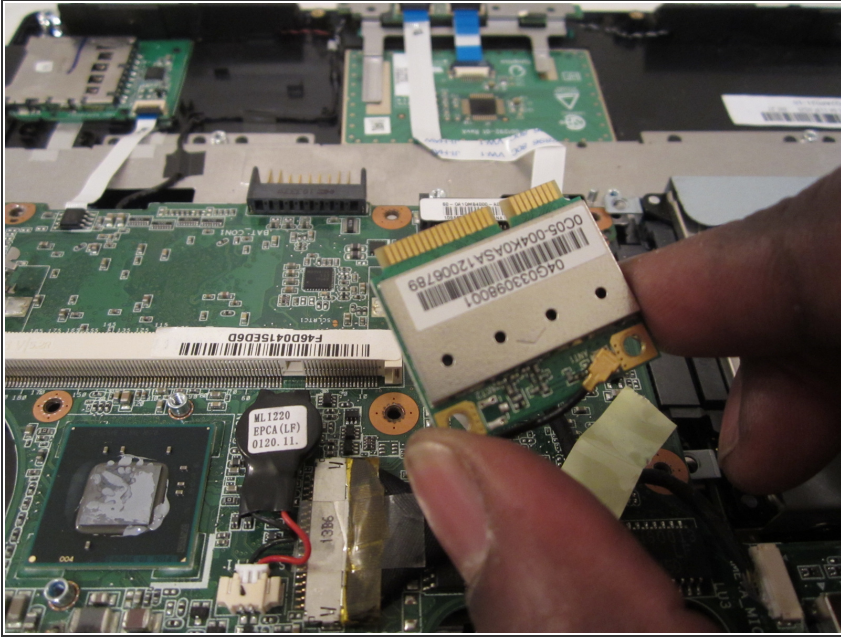

- Remove and replace the wireless card.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 01:01:58 AM.